


SPECIFICATIONS

Voltage Rating:50V(AC)  
 Current Rating:1.0A  
 Contact Resistance:20Milliohms Max.  
 Insulation Resistance:100Megohms Min.  
 Dielectric Withstanding Voltage:500V AC/1Minute  
 Insulator:Nylon 46  
 UL 94V-0 Color:Natural  
 Contact:Phosphor Bronze  
 Tin Lead Plated  
 Temperature Range:-25°C ~+85°C

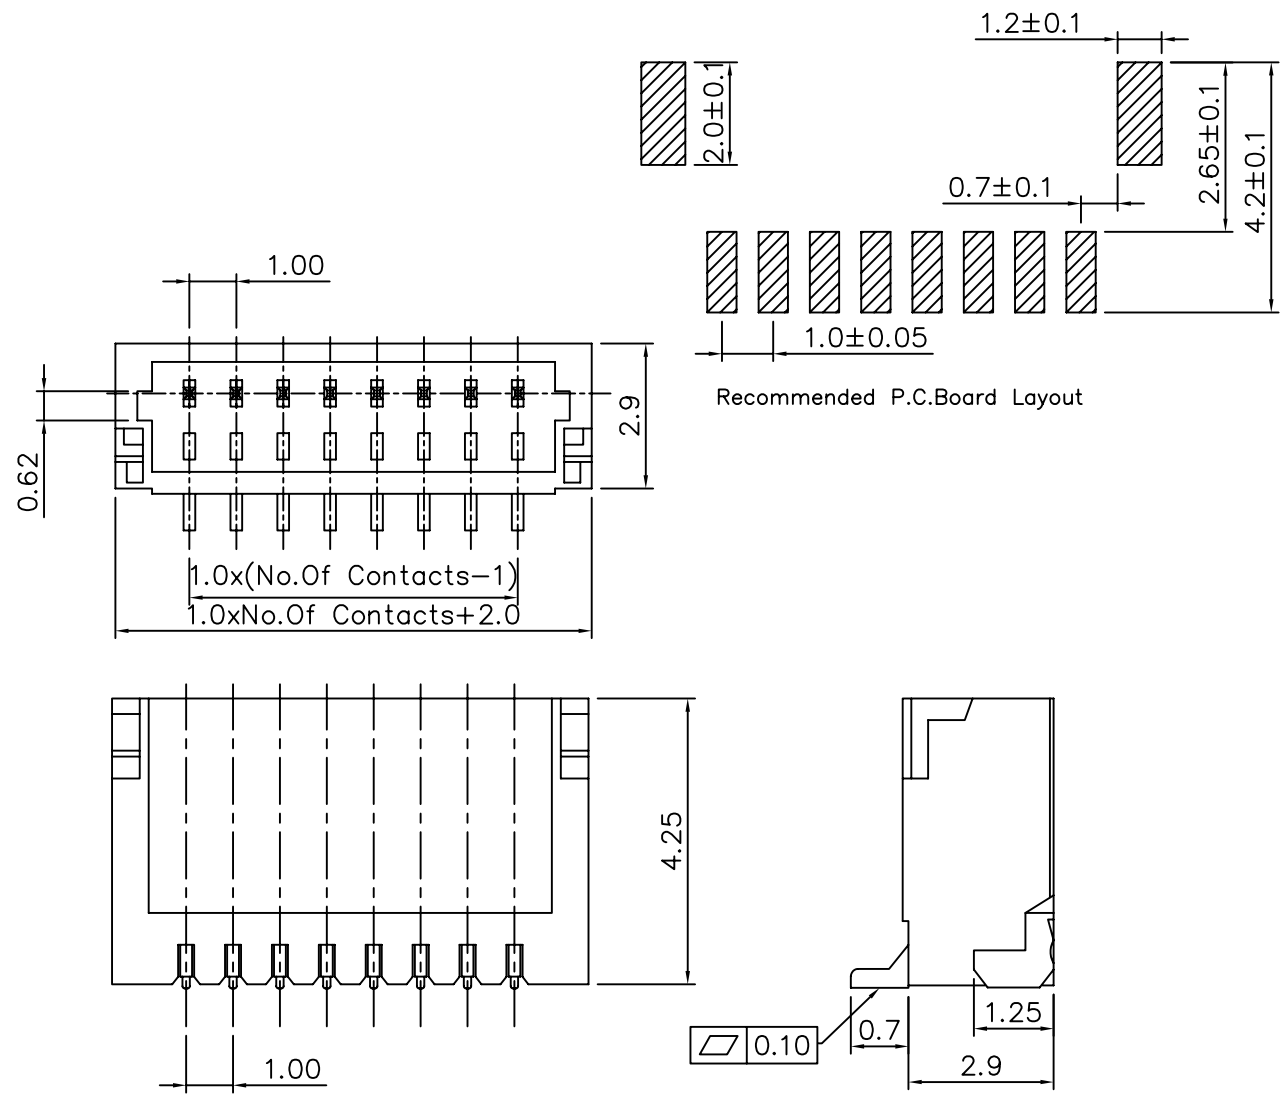

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 07267

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.2  
 .XX ±0.15  
 .XXX

SCALE NONE

REV. A0

UNIT mm

NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE