
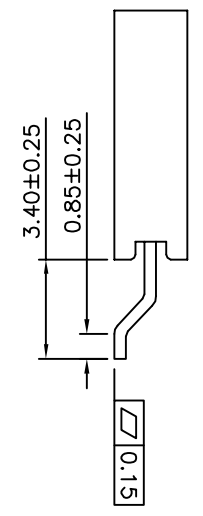
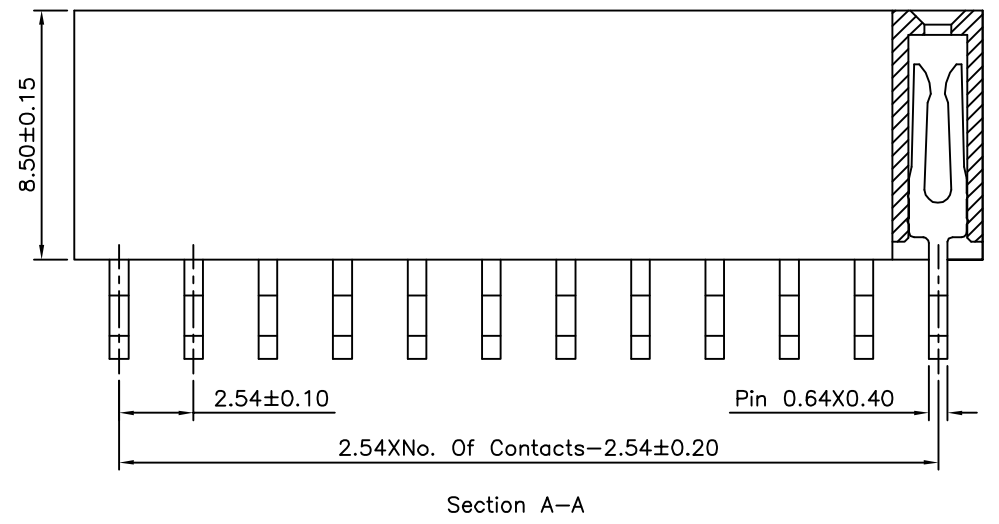


SPECIFICATION
 Current Rating: 3.0 Amp
 ⚠ Withstand Voltage: 1000V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Brass, Gold Plated Over Nickel
 ⚠ Insulator: PA9T+30%G.F. (UL94V-0), Black
 RoHS Compliant

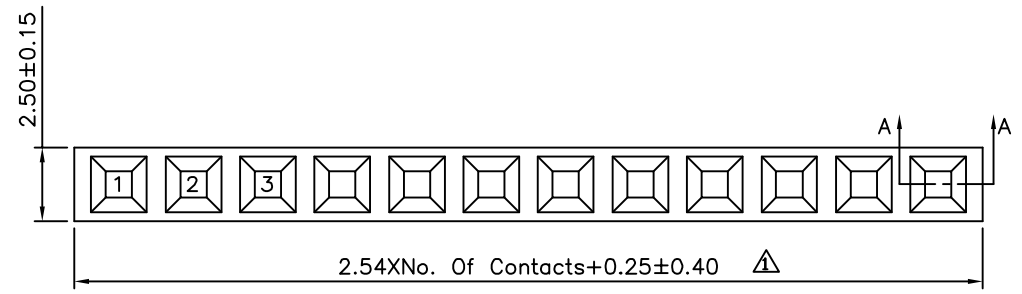

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
19686		MEI		
		CHECKED BY HZF		
		DRAWING BY SONG		UNIT mm
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
⚠ A2		Modify Data	HZF	10/11/2012
⚠ A1		Modify Data	HZF	07/02/2012
⚠ A0		NEW RELEASE	HZF	06/02/2009