

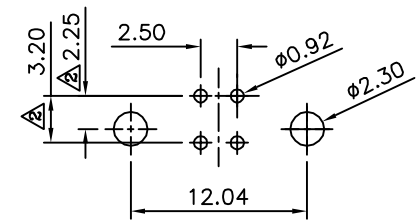

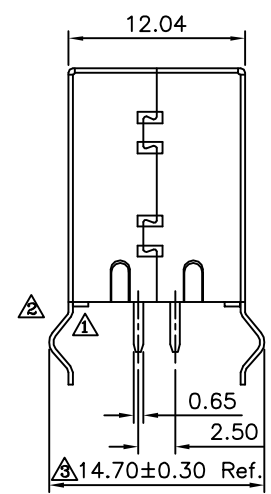


SPECIFICATION

Current:1.5A Max.
 Voltage:30V Max.
 Withstanding Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Mating Force:35N Max.
 Withdrawal Force:10N Min.
 Durability:1500 Cycles Min.
 Contact:Phosphor Bronze
 Gold Flash On Contact Area,
 Tin Plated On Solder Tail,Under Nickel
 Insulator:PBT+30%G.F.(UL94V-0),White
 Shell:Brass,Nickel Plated Over All
 RoHS Compliant

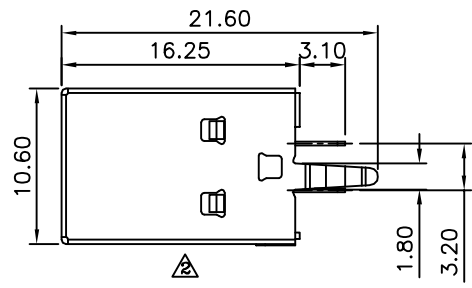

Recommended P.C.B. Layout



4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	NO. REV.	REVISIONS	CHK	DATE				
05245		MEI							B3	Modify Data	HZF	09/13/2010
		HZF							B2	Modify Data	HZF	07/07/2010
SCALE		REV.		.X ±0.38 .X* ±2* .XX ±0.25 .XX* ±1* .XXX ±0.13 .XXX* ±0.5*	B1	Deldte Dim. 0.15	HZF	01/28/2010				
NONE		B3		UNIT mm	B0	NEW RELEASE	HZF	05/06/2009				